

Wireless Base Station RTR-500 Features and Specs

Data Transfer USB	Data Monitoring T&D Cloud Service, Internet	Warning Monitoring Set Limit Exceeded / Sensor Error / Communi- cation Error etc...	Warning Notification E-mail Software
-----------------------------	--	---	---

This wireless base station can be connected to your PC via USB and with the supplied software you can easily collect and transfer recorded data from loggers as well and monitor for current readings and warnings. It can also be used as a repeater for our RTR-500 Series.

Auto-Download Recorded Data

This allows you to automatically collect recorded data from loggers to a PC.

Monitoring for Current Readings and Warnings

It is possible to view current readings from and get warnings to your PC, send warning e-mails as well as send recorded data and current readings to an FTP server, including our free T&D WebStorage Server.


Easily Manage Up to 20 Groups x 32 Loggers

In each group it is possible to manage up to 32 separate data loggers (remote units), and up to 30 repeaters can be added to each group.

*For RTR-574 and RTR-576, registration of one unit will be counted as two units.

Use a Repeater to Expand Communication Range

The communication range between logger and base is about 150 meters (500 ft), but for RTR-500 Series this can be easily extended by adding RTR-500 units as repeaters.

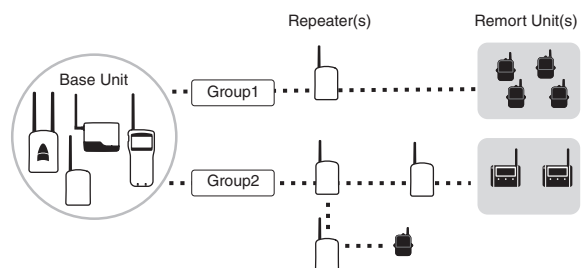

Communication DLL specs for the RTR-500 Series, as well as, file formats for Current Readings Files and Recorded Data Files (XML) are available free of charge to our customers. With these it is possible to develop and create your own applications and systems.

RTR-500 Specifications

	RTR-500
Compatible Devices	Remote Units: RTR-501 / 502 / 503 / 507S / 574 / 576 / 505-TC / 505-Pt / 505-V / 505-mA / 505-P (Including L Type and S Type) RTR-601-110 / 130 / E10 / E30 (*1) (RTR-601 Series is available for US only) Repeater: RTR-500
Maximum Number of Registrations	Remote Units: 32 units (*2) x 20 groups Repeaters: 30 units x 20 groups
Communication Interfaces	Between Base Unit(s) - (Repeaters) - Remote Unit(s) ·Short Range Wireless Communication FCC Part15 Section247 / IC RSS-210 (Frequency Range: 902 to 928MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870MHz, RF Power: 5 mW) ·Optical Communication With compatible Remote Units except RTR-574 and RTR-576 Between Base Unit - PC ·USB Communication ·Serial Communication: RS-232C (*3)
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed
Communications Protocol	SMTP (POP before SMTP, SMTP-AUTH (LOGIN / PLAIN / CRAM-MD5), SMTP over SSL/TLS, STARTTLS), FTP (*4)
Power	USB Bus Power, AA Alkaline Battery x 2, AC Adaptor AD-06A1 or AD-06C1 (*5)
Battery Life (*6)	As a Repeater: Approx. 6 months (When downloading full data once a day from one Remote Unit with one Repeater)
Dimensions	H 96 mm x W 65 mm x D 25 mm, Antenna Length: 109 mm
Weight	Approx. 70 g
Operating Environment	Temperature: -10 to 60 °C (-30 to 60 °C with external power connected) Humidity: 90 %RH or less (no condensation)
Accessories	Antenna, USB Mini-B Cable US-15C, Software CD-ROM, Memo Sticker, Manual (Warranty Included)

*1: Customers wishing to use the RTR-500 as a Base Unit in conjunction with the RTR-601 series devices, please contact your local distributor for the communications protocol specifications to write your own software.

*2: For RTR-574 and RTR-576, registration of one unit will be counted as two units.

*3: Customers wishing to write their own software, please contact your local distributor for the serial communications protocol specifications. (Note: Optional serial communication cable TR-07C is also required.)

*4: For RTR-500, the protocol is implemented in the software.

*5: When using a USB connection, the RTR-500 requires neither batteries nor AC adaptor. Please prepare two AA batteries or an AC adaptor when using the RTR-500 as a Repeater.

*6: Battery life varies depending upon multiple factors including ambient temperature, frequency of communication, and battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

The specifications listed above are subject to change without notice.