

Network Base Station

RTR500BW Features and Specs

Data Transfer

Wireless LAN
Wired LAN

Data Monitoring

T&D WebStorage Service,
Internet/Intranet


Warnings

Set Limit Exceeded, Sensor Error
Communication Error etc...

Warning Notification

E-mail, External
Contact Output

RTR500BW is a wireless data collector (base unit) with built-in wireless/wired LAN communication capabilities.

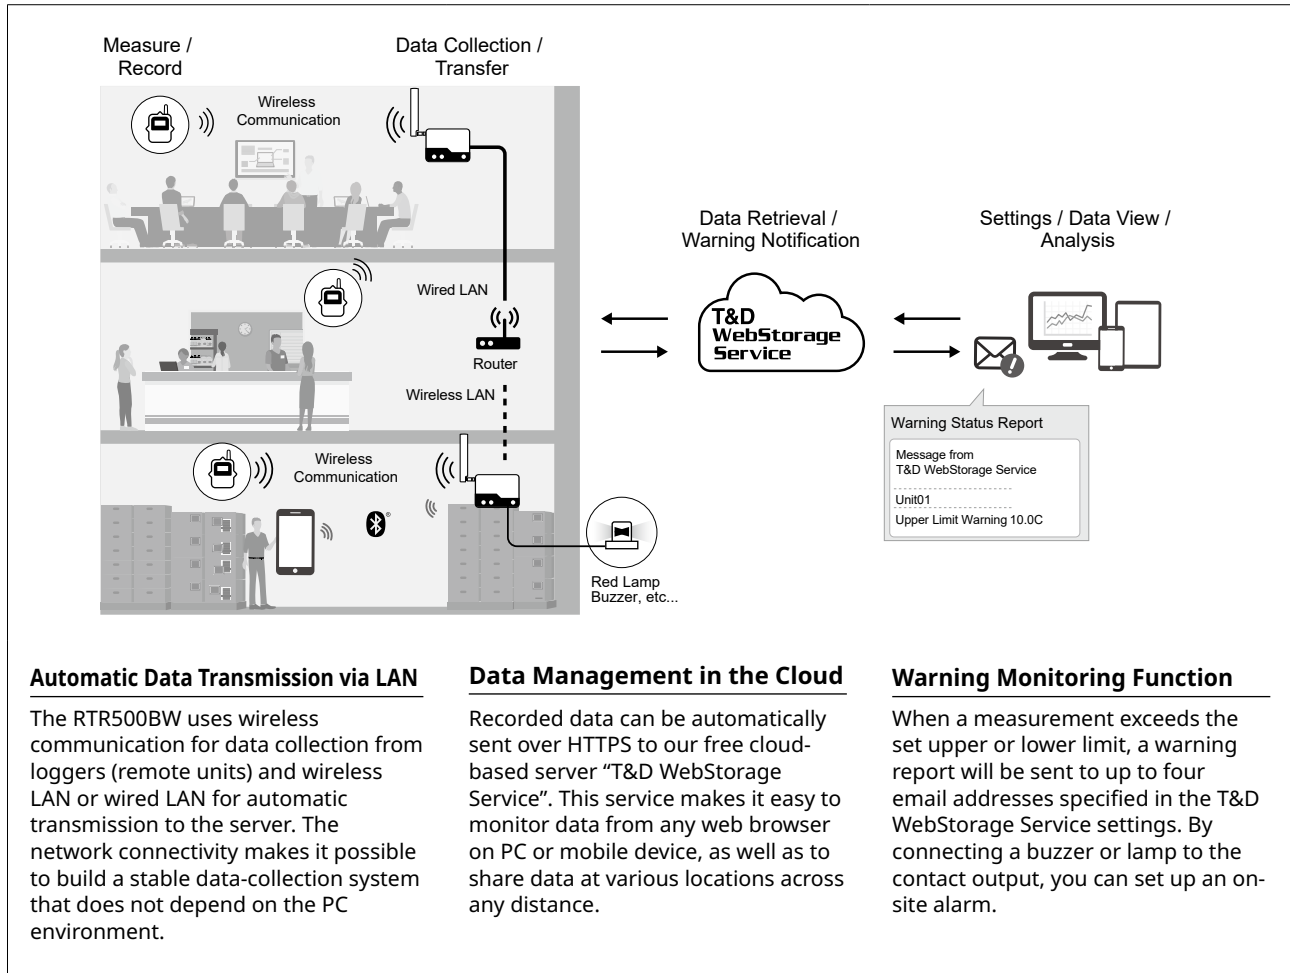

Initial Settings via Bluetooth® or USB

Initial settings can be made either on a mobile device using Bluetooth or on a PC using USB.

Remote Settings

By using our mobile app, it is also possible to make settings remotely over the cloud, such as the device name, recording interval, warning conditions, additional device registration, etc.

Extension Possible for Wireless Communication

The wireless communication range between a base and a remote unit, if unobstructed and direct, is about 150 meters (500 ft). This range can be extended by using a wireless repeater (RTR500BC).

Auto Wireless Route Settings

The most suitable route is automatically selected for wireless communication. This function makes installation simple and easy, even in a large-scale building that requires multiple repeaters.

Data Management on Intranet

You can set up a PC as a data destination by installing our free-of-charge "T&D Data Server" software. Functions such as saving received recorded data, monitoring and graph display with a web browser, and warning mail transmission are available even in environments where you cannot use the cloud service.

Communication DLL specs for the RTR500B Series, as well as, file formats for Current Readings Files and Recorded Data Files (XML) are available free of charge to our customers. These allow you to integrate our products into your own applications and systems.

RTR500BW Specifications

	RTR500BW
Compatible Devices	Remote Units: RTR500B Series (RTR501B / 502B / 503B / 505B / 507B) Including L Type RTR-500 Series (RTR-574 / 576) Including S Type (*1) RTR-600 Series (RTR-602S / 602L / 602ES / 602EL) (*1) Repeaters: RTR500BC Other devices (*2)
Maximum Number of Registrations	Remote Units: 50 units Repeaters: 10 units x 4 groups
Communication Interfaces	Short Range Wireless Communication For US: Frequency Range: 902 to 928 MHz RF Power: 7 mW Transmission Range: About 150 meters (500 ft) if unobstructed and direct (*3) For EU: Frequency Range: 869.7 to 870 MHz RF Power: 5 mW Transmission Range: About 150 meters if unobstructed and direct Wired LAN (RJ45 connector 100 Base-TX/10 Base-T) Wireless LAN (IEEE 802.11 a/b/g/n, WEP (128bit) / WPA-PSK(TKIP) / WPA2-PSK (AES)) Bluetooth 4.2 (Bluetooth Low Energy) For Settings USB 2.0 (Mini-B connector) For Settings Optical Communication (proprietary protocol)
Communication Time	Data Download Time (for 16,000 readings) Via wireless communication: About 2 minutes An additional 30 seconds should be added for each Repeater. (*4)
External Output Terminal	PhotoMOS Relay Output OFF-State Voltage: AC/DC 50 V or less ON-State Current: 0.1 A or less ON-State Resistance: 35 Ω
Communication Protocol (*5)	HTTP, HTTPS, FTP, SNMP, DHCP, DNS
Power	AC Adaptor (AD-05A4 or AD-05C1) PoE (IEEE 802.3af)
Dimensions	H 83 mm x W 102 mm x D 28 mm (excluding antenna) Antenna Length: 115 mm
Weight	Approx. 130 g
Operating Environment	Temperature: -10 to 60 °C Humidity: 90 %RH or less (without condensation)
Included Items	Antenna CSR-0011, USB Mini-B Cable US-15C, AC Adaptor AD-05A4 or AD-05C1, Registration Code Label, Manual Set (Warranty Included)

*1: RTR-500 Series and RTR-600 Series (for US only) do not have Bluetooth capability.

*2: Also compatible with the following discontinued products: RTR-501/502/503/507S/505, RTR-500, and RTR-601-110/130/E10/E30. Please refer to "Compatibility Info for RTR500B and RTR-500 Series" (<https://tandd.com/information/compatible-rtr500b-loggers.html>).

*3: Transmission range between RTR500BW and RTR-600 Series loggers is about 50 meters.

*4: When using RTR500BC as Repeater. Depending upon conditions it may take up to an additional 2 minutes.

*5: Client Function. Communication via proxy is not supported.

The specifications listed above are subject to change without notice.